
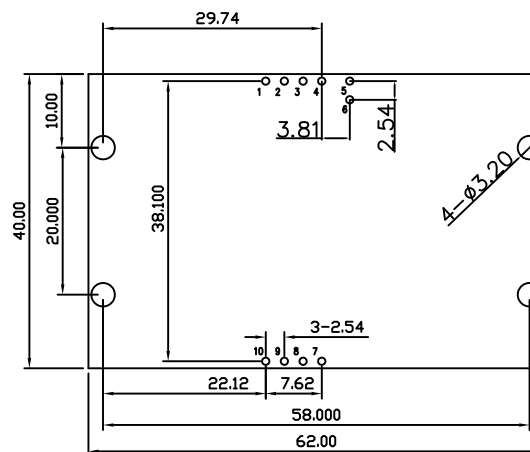


SEC. C-C

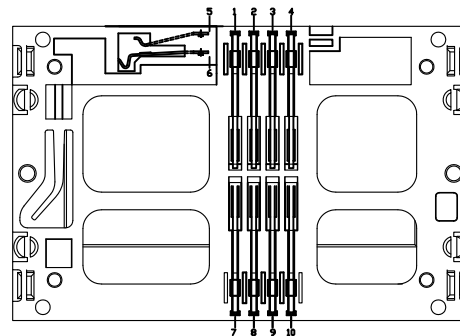

RECOMMENDED PCB LAYOUT
TOL.:±0.05

NOTE:

- 1.CARD INSERTION SPECIFICATION
 - A. CARD INSERTION DEPTH:35.3 MM.
 - B. CARD THICKNESS=0.7-0.8 MM.
- 2.MATERIAL AND FINISH:
 - A. HOUSING: PBT UL 94-V0 COLOR: BLACK.
 - B. CONTACT:PHOSPHOR BRONZE.SELECTIVE PLATING AU OVER 50u" NI MIN UNDERPLAT SN ONLY ON TAIL ZONE.
 - C. SWITCH:PHOSPHOR BRONZE.SELECTIVE PLATING AU OVER 50u" NI MIN UNDERPLAT SN ONLY ON TAIL ZONE.

REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE
1				
2				
3				

	深圳市鑫南天科技有限公司 Shenzhen XinNanTian Technology Co., Ltd				
	DIMENSIONS INIT: mm UNLESS OTHERWISE SPECIFIABLE	PRODUCT NAME : Smart card connector 6.20H	DRAWING: COCO	DATE: 2014/01/15	
	DIMENSION TOLERANCE X.X: ± 0.38 X.XX: ± 0.25 X.XXX: ± 0.10 ANGULAR: ± 1°	PRODUCT NO. : XNT-SC-807-08620	CHECK: AG	DATE: 2014/01/15	
		DRAWING NO. : XNT-SC-807-08620	APPROVED: JEFF	DATE: 2014/01/15	
		SCALE: NA	DWG ID: P D	REV.: A	PAGE: 1 OF 1