


RECOMMENDED PCB LAYOUT(TOP VIEW)
(GENERAL TOLERANCE ± 0.05)

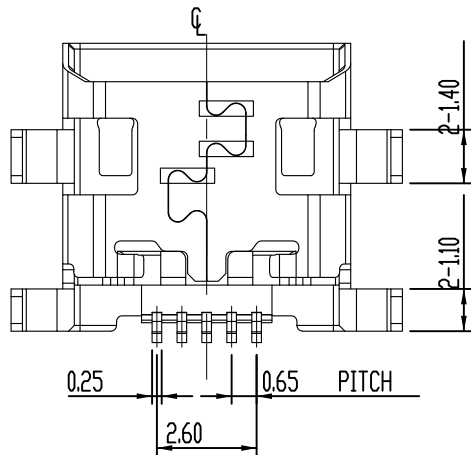

NOTES:

1).SPECIFICATIONS:

- 1.1.VOLTAGE RATING:100V AC
- 1.2.CURRENT RATING:1.0A
- 1.3.INSULATION RESISTANCE:100 MEG.OHM MIN.
- 1.4.CONTACT RESISTANCE:50 MILL.OHM MAX.
- 1.5.OPERATION TEMPERATURE:-30
- 1.6.INSERT FORCE:35 N MAX.
- 1.7.EXTRACT FORCE:8 N MIN.
- 1.8.DURABILITY:10000 CYCLES

° TO +80 °

2).PLATING:

TERMINAL:

CONTACT AREA:GOLD FLASH,
SOLDER TAIL AREA:GOLD FLASH
UNDER PLATING:NICKEL 40u' Min.

SHELL:

MATTE TIN 80u' Min.
UNDER PLATING:NICKEL 40u' Min.

3	SHELL	STAINLESS STEEL		
2	TERMINAL	COPPER ALLOY		
1	HOUSING	HIGH TEMP	BLACK	UL 94V-0
NO.	DESCRIPTION	MAT.L	COLOR	REMARK

深圳市鑫南天科技有限公司
Shenzhen XinNanTian Industrial Co.,Ltd

CUSTOMER COPY TITLE: MICRO USB 5PIN 沉板0.93 四脚插板 斜口

					Angle ±2°	DESIGN	COCO	04/23/13	
					X ±0.35	CHECK	JANY	04/23/13	
				.X ±0.25					
				.XX ±0.20					
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRD.	APPRD.	JEFF	04/23/13	

PART NO.		XNTMICR05PCB093XK		
PRODUCT SPEC.		XNTMICR05P00300		
C	FILE NAME.	XNTMICR05PCB093XK-C		
ING	SCALE	5:1	UNIT:mm	A4
SHEET:		1 of 2		