


* 所有原料材质, 生产制程, 电镀必须符合ROHS要求

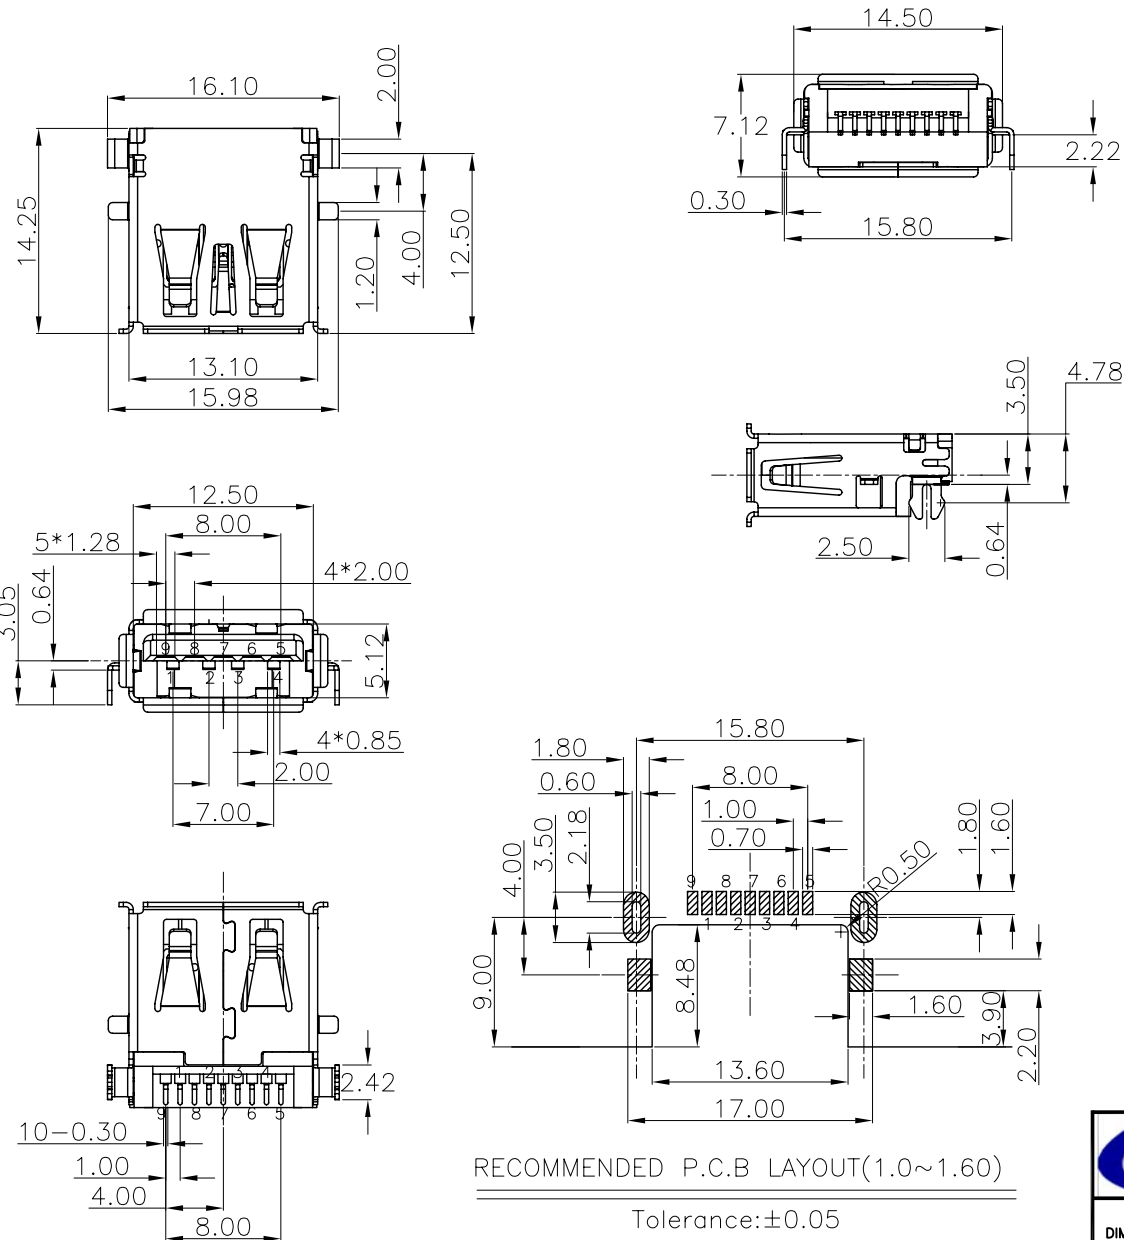

RECOMMENDED P.C.B LAYOUT(1.0~1.60)
Tolerance: ±0.05

NOTES:

- 1.ELECTRONIC:
CONTACT RESISTANCE: 30mohm MAX
INSULATION RESISTANCE: 1000 Mohm MIN
WITHSTAND VOLTAGE:AC 500V,1min.
- 2.MECHANICAL:
DURABILITY: 1500 CYCLE.
- 3.ENVIRONMENT CHARACTERISTICS:
OPERTING TEMPERATURE:-25°C TO +85°C
- 4.PART NO.

SUS F 009 9 XX 1 117 JK
 USB SERIES ————
 FEMALE ————
 9PIN ————
 PITCH SERIES ————
 RUNNING NO. ————
 1=SMT TYPE
 00=GOLD FLASH
 05=5U" AU
 15=15U"AU

5.MATERIAL LIST:

3	SHELL	1	COPPER ALLOY	NI PLATED
2	CONTACT	9	COPPER ALLOY	AU/TIN PLATED
1	HOUSING	1	THERMOPLASTIC	(UL 94V-0) BLUE
No.	PART NAME	QTY	MATERIAL	REMARK

Pin #	SIGNAL NAME	DESCRIPTION	MATING SEQUENCE
1	VBUS	POWER	SECOND
2	D-	USB 2.0 DIFFERENTIAL PAIR	THIRD
3	D+		
4	GND	GROUND FOR POWER RETURN	SECOND
5	StdA_SSRX-	SUPERSPEED RECEIVER DIFFERENTIAL PAIR	LAST
6	StdA_SSRX+		
7	GND_DRAIN	GROUND FOR SIGNAL RETURN	
8	StdA_SSTX-	SUPERSPEED TRANSMITTER DIFFERENTIAL PAIR	
9	StdA_SSTX+		
Shell	Shield	CONNECTOR METAL SHELL	FRIST

XNT 深圳市鑫南天科技有限公司
Shen zhen Xin Nan Tian Technology Co., Ltd

DIMENSIONS INIT: mm UNLESS OTHERWISE SPECIFIABLE DIMENSION TOLERANCE LINEAR ANGLE X. ±0.50 X. ±5° X.X ±0.38 X.X ±2° X.XX ±0.25 X.XX ±1°	PRODUCT NAME : USB 3.0 AF=sinking 2.22mm -Top mount3.5H - Terminal:SMT Shell Hydrid type-with flange	DRAWING: COCO	DATE: 2008/08/08	
	PRODUCT NO. : SUSF009001117JK	CHECK: JANY	DATE: 2008/08/08	
	DRAWING NO. : XNT-USB30-0092	APPROVED: JEFF	DATE: 2008/08/08	
		SCALE: 1:1	DWG ID: P D	REV.: A

REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE
1				
2				
3				