


Shen zhen Shi Xin Nan Tian Industrial Co., Ltd
www.sznantian.com

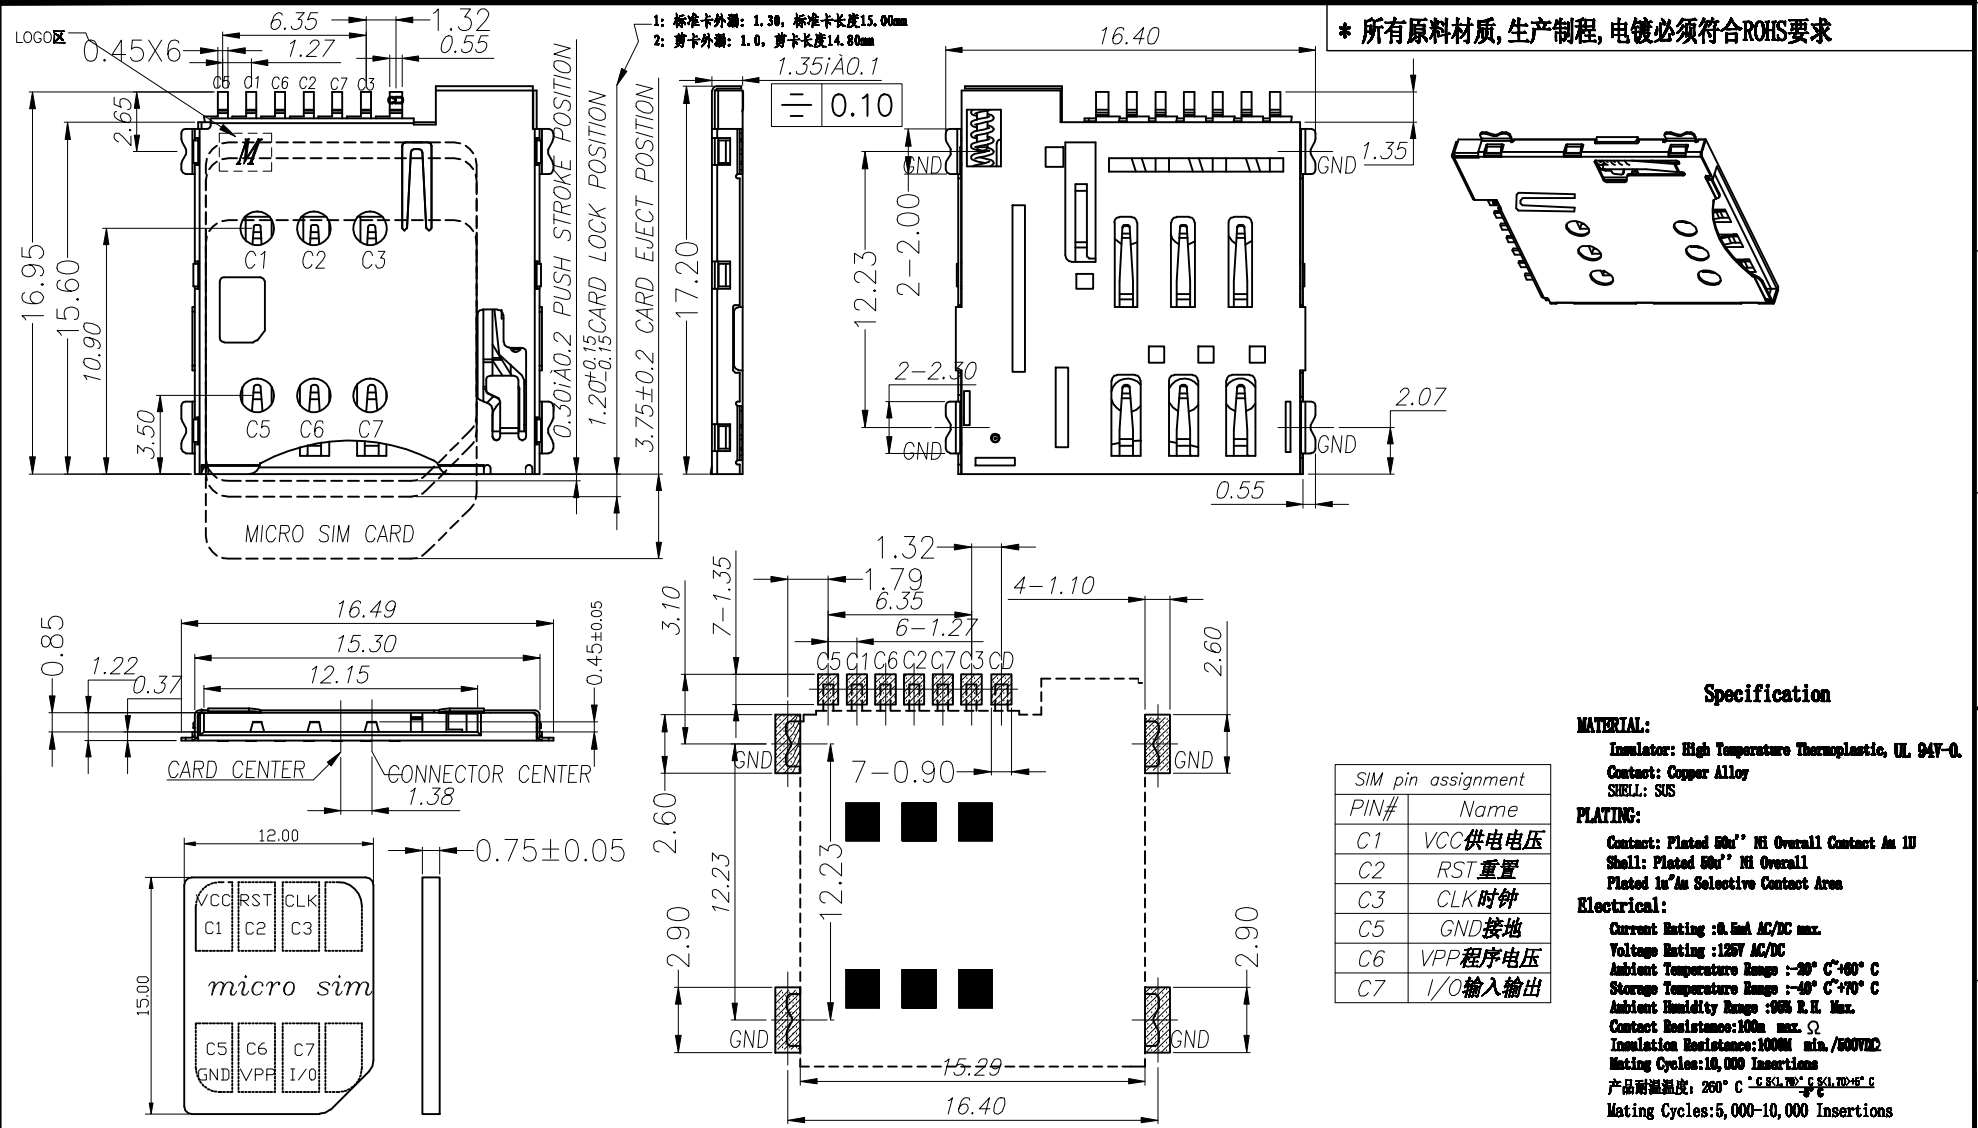

* 所有原材料, 生产制程, 电镀必须符合ROHS要求

- 1: 标准卡外漏: 1.30, 标准卡长度15.00mm
- 2: 剪卡外漏: 1.0, 剪卡长度14.80mm


Specification

MATERIAL:
 Insulator: High Temperature Thermoplastic, UL 94V-0
 Contact: Copper Alloy
 SHELL: SUS

PLATING:
 Contact: Plated 50μ" Ni Overall Contact Au 1D
 Shell: Plated 50μ" Ni Overall
 Plated 1μ" Au Selective Contact Area

Electrical:
 Current Rating :0.5A AC/DC max.
 Voltage Rating :125V AC/DC
 Ambient Temperature Range :-20° C~+60° C
 Storage Temperature Range :-40° C~+70° C
 Ambient Humidity Range :95% R.H. Max.
 Contact Resistance:100m max. Ω
 Insulation Resistance:1000M min./500VDC
 Mating Cycles:10,000 Insertions
 产品耐插拔: 200° C ±0.5°C/1000次
 Mating Cycles:5,000-10,000 Insertions

SIM pin assignment	
PIN#	Name
C1	VCC 供电电压
C2	RST 重置
C3	CLK 时钟
C5	GND 接地
C6	VPP 程序电压
C7	I/O 输入输出

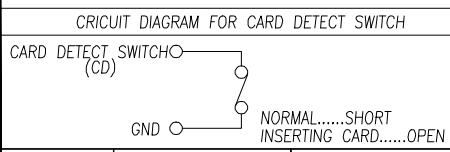

PCB 焊盘区
 下沉定位区

RECOMMENDED PCB LAYOUT
 GENERAL TOLERANCE ±0.05



深圳市鑫南天科技有限公司
 Shen zhen Shi Xin Nan Tian Industrial Co., Ltd

DIMENSIONING UNIT: mm UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCE LXX: ± 0.15 LXX: ± 0.10 LXXX: ± 0.05 ANGULAR: ± 1°	PRODUCT NAME: MICRO-SIM 卡座/PIN#1.35H @CD PIN INT 811mm	DRAWING: COCO	DATE: 2015/10/10	
	PRODUCT NO.: 0121BAAA07A	CHECK: JANY	DATE: 2015/10/11	
	DRAWING NO.: XNT-0012	APPROVED: 林心祥	DATE: 2015/10/11	
		SCALE: 1:1 DWG. ID: CB REV.: B	PAGE: 1 of 1	

由 Autodesk 教育版产品制作