

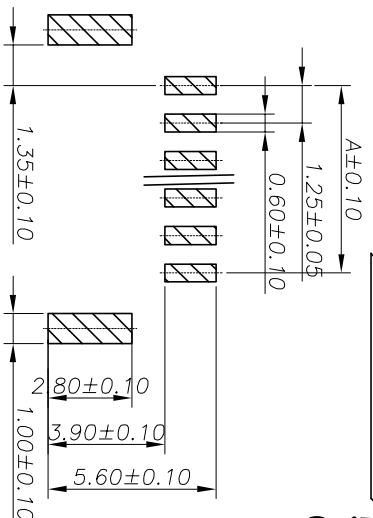

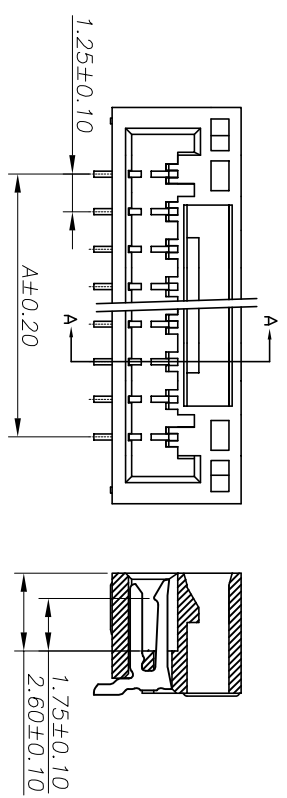

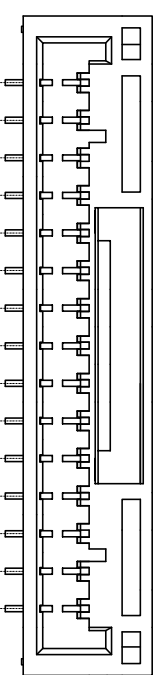


- 技术指标:
- 1、塑件表面应光洁、无毛刺、明显收缩、缺陷、裂纹等现象;
 - 2、温度范围: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 - 3、额定电压: 50V, AC, DC (等效);
 - 4、接触电阻: $\leq 20\text{M}\Omega$;
 - 5、绝缘电阻: $500\text{M}\Omega$
 - 6、耐压: 500V, AC/minute.

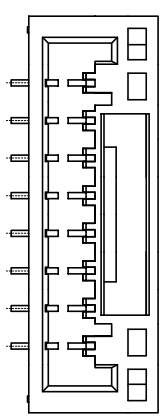

PCB Layout

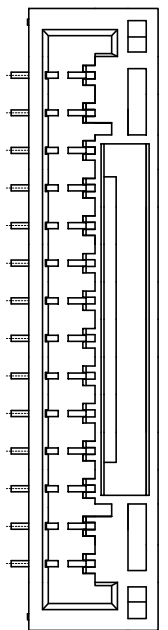

编号	尺寸 (mm)		
	A	B	C
A1254LF-02A	1.25	5.70	4.80
A1254LF-03A	2.50	6.95	6.05
A1254LF-04A	3.75	8.20	7.30
A1254LF-05A	5.00	9.45	8.55
A1254LF-06A	6.25	10.70	9.80
A1254LF-07A	7.50	11.96	11.06
A1254LF-08A	8.75	13.21	12.31
A1254LF-09A	10.00	14.46	13.56
A1254LF-10A	11.25	15.71	14.81
A1254LF-11A	12.50	16.96	16.06
A1254LF-12A	13.75	18.22	17.32
A1254LF-13A	15.00	19.47	18.57
A1254LF-14A	16.25	20.72	19.82
A1254LF-15A	17.50	21.97	21.07
A1254LF-16A	18.75	23.22	22.32

14-16A

8-13A

15A





2-7A

GENERAL	TOLERANCE	制图	料号	版本
X. ±0.25	X.° ±2°	王建丰	A1254LF-nA	
X. ±0.20	X.° ±1°	审核	品名	页次 1/1
XX. ±0.15	X.X.° ±0.5°	批准	GH立贴	
XX. ±0.10	X.X.° ±0.5°	单位		





MM	比例	深圳市鑫南天科技有限公司
1:1		



- 技术指标:
- 1、塑件表面应光洁、无毛刺、明显收缩、缺陷、裂纹等现象;
 - 2、温度范围: $-25^{\circ}\text{C}\sim+85^{\circ}\text{C}$
 - 3、额定电压: 50V, AC, DC(等效);
 - 4、接触电阻: $\leq 20\text{M}\Omega$;
 - 5、绝缘电阻: $500\text{M}\Omega$
 - 6、耐压: 500V, AC/minute.

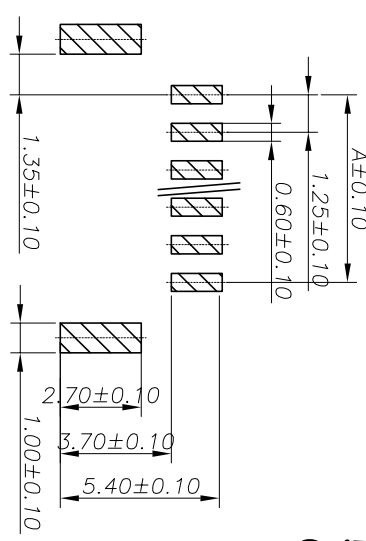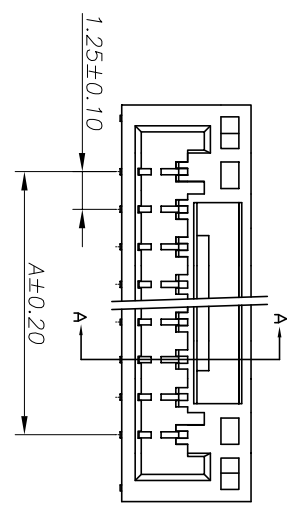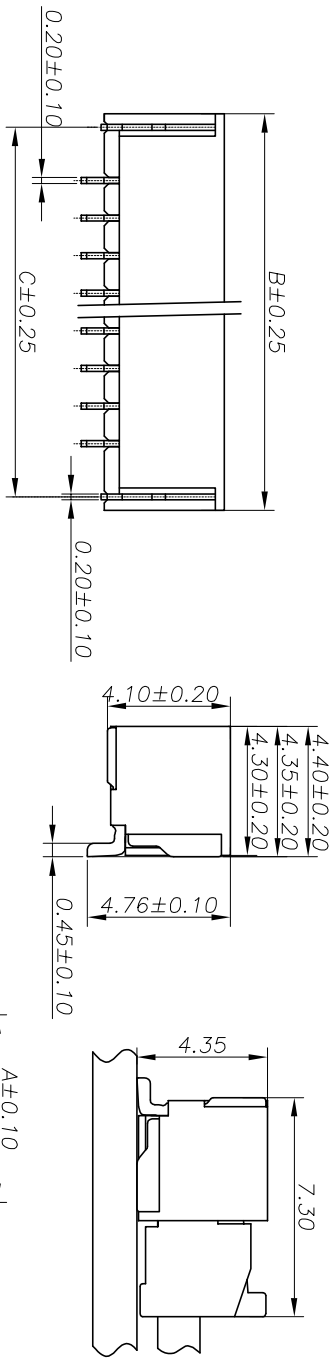

PCB Layout

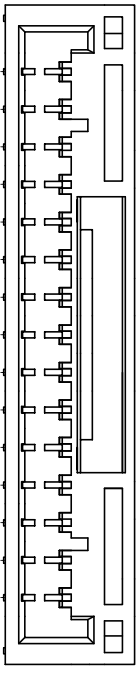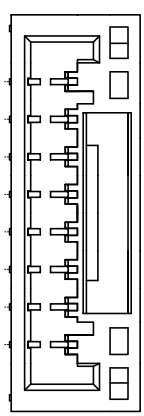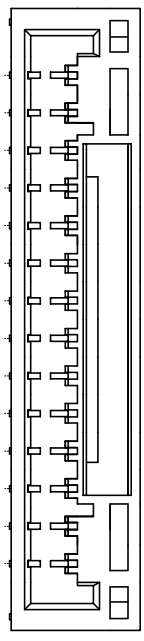

编号	尺寸 (mm)		
	A	B	C
A1254WF-02A	1.25	5.70	4.80
A1254WF-03A	2.50	6.95	6.05
A1254WF-04A	3.75	8.20	7.30
A1254WF-05A	5.00	9.45	8.55
A1254WF-06A	6.25	10.70	9.80
A1254WF-07A	7.50	11.96	11.06
A1254WF-08A	8.75	13.21	12.31
A1254WF-09A	10.00	14.46	13.56
A1254WF-10A	11.25	15.71	14.81
A1254WF-11A	12.50	16.96	16.06
A1254WF-12A	13.75	18.22	17.32
A1254WF-13A	15.00	19.47	18.57
A1254WF-14A	16.25	20.72	19.82
A1254WF-15A	17.50	21.97	21.07
A1254WF-16A	18.75	23.22	22.32

GENERAL	TOLERANCE
X. ±0.25	X.° ±2°
X. ±0.20	X.° ±1°
XY. ±0.15	X.Y.° ±0.5°
XX. ±0.10	X.XX.° ±0.5°

制图		审核		批准		单位		比例		深圳市鑫南天科技有限公司	
王建丰	料号	薛明	品名		GM贴		版本	1:1			
	A1254WF-16A										

