

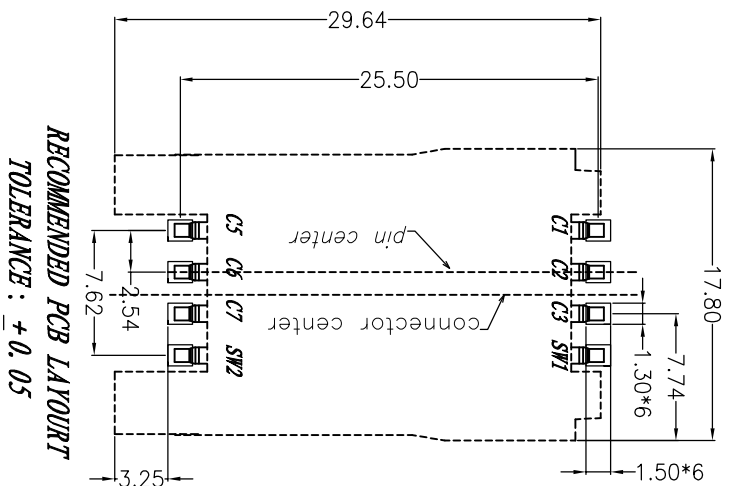

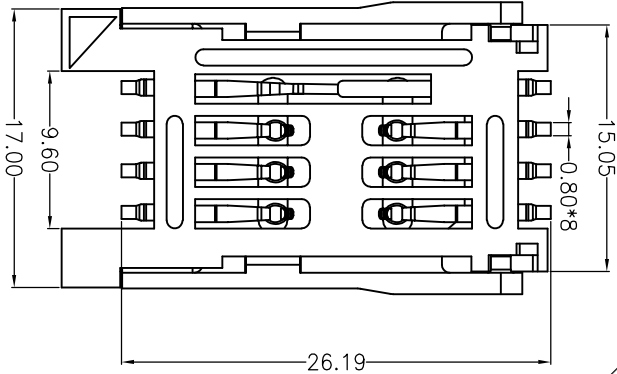

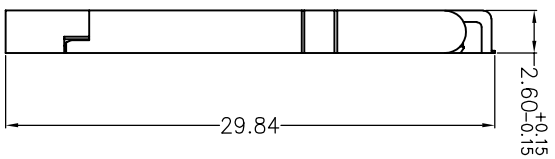
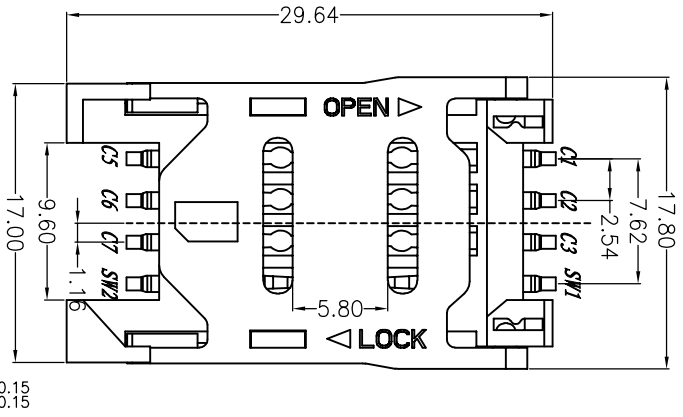



* All Raw Material, Manufacturing, Plating process comply with ROHS



RECOMMENDED PCB LAYOUT
TOLERANCE: ± 0.05

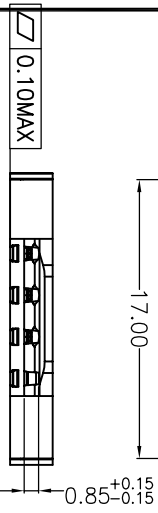


弹高
REMARKS:
附注:

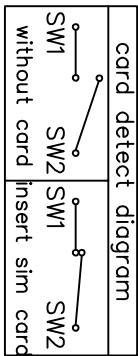

SIM卡引脚功能定义

触电号	分 配	触电号	分 配
C1	电源电压 VCC	C5	地 GND
C2	复位 RST	C6	编程电压 VPP
C3	时钟 CLK	C7	输入/输出 I/O
SW1	detect pin1	SW2	detect pin2



Technical Specialty
技术特性

Rated Voltage: 50V AC/DC Max
额定电压: 50V AC/DC Max
Current Rating: 1.0A Max
额定电流: 1.0A Max
Insulation Resistance: 1000MΩ Min
绝缘电阻: 1000MΩ Min
Contact Resistance: 100mΩ Max
接触电阻: 100mΩ Max
Withstand Voltage:
耐压: 500V AC/minute
Operating Temperature: -40°C ~ +85°C
工作温度: -40°C ~ +85°C

REMARKS:
附注:

1. MATERIAL:
材料:

1.1 HOUSING: THERMOPLASTIC
本体: 热塑性塑胶料

COLOR: WHITE
颜色: 白色

1.2 COVER: THERMOPLASTIC
盖子: 热塑性塑胶料

COLOR: WHITE / BLACK
颜色: 白色 / 黑色

2. PLATING:
表面处理:

2.1 CONTACT:
接触件: 磷铜

2.2 CONTACT:
接触件: 镀镍底50μm, 接触点金1μm, 焊脚镀50μm.

NICKEL AND 50μm MIN CONTACT 1μm, PVD TIN 50μm / MIN

接触件: 镀镍底50μm, 接触点金1μm, 焊脚镀50μm.

REVISION NO.	1	2	3	4	5	6
DESCRIPTION						
DATE						
MARK						



深圳市鑫南天科技有限公司
Shen zhen Xin Nan Tian Technology Co., Ltd

UNLESS OTHERWISE SPECIFIABLE	TOLERANCE	± 0.15
X.X ±		0.10
X.XX ±		0.05
ANGULAR ±		1°

PRODUCT NAME:	SIM标准50P-SW PIN
PRODUCT NO.:	0431CALAS08A
DRAWING NO.:	043
SCALE:	1:1
DATE:	2017/11/10
DATE:	2017/11/10
DATE:	2017/11/10
DATE:	2017/11/10

PRODUCT NAME:	COCO
PRODUCT NO.:	JANY
DRAWING NO.:	林心祥
SCALE:	1:1
DATE:	2017/11/10
DATE:	2017/11/10
DATE:	2017/11/10
DATE:	2017/11/10

PRODUCT NAME:	COCO
PRODUCT NO.:	JANY
DRAWING NO.:	林心祥
SCALE:	1:1
DATE:	2017/11/10
DATE:	2017/11/10
DATE:	2017/11/10
DATE:	2017/11/10